



DRYZONE User's Guide

C A R E

1. Rinse off pod [a] and outer pack [b] with fresh water after each exposure to salt water and contaminants. Sponge off dirt with mild soap and water. See photo 1
2. If the TIZIP is over-stressed during closure, the zipper may separate. If this happens, move the slider back, reduce the cross tension, then re-close.

The waterproofness of the TIZIP will be compromised if the zipper is bent, damaged, dirty or not fully closed.




If the DryZone is used to protect sensitive equipment, the sealing function should be double-checked prior to usage. To ensure your DryZone does not leak, follow these guidelines:

- The head of the zipper must be completely pulled to the end into its locked position.
- The zipper must be sufficiently lubricated before use. See lubrication instructions for details.
- Do not distort the zipper.
- Keep the zipper clean.
- The DryZone is waterproof but NOT intended to be submerged for any period of time.
- Do not use the DryZone as a personal flotation device.
- Additional lubrication can be found at many outdoor and diving equipment stores.
- Contact Lowepro customer service at info@lowepro.com for additional information.

T I Z I P[®] M A I N T E N A N C E

Regular maintenance with TIZIP lubricant is necessary for long-term performance. Follow steps 1-9, as shown, to properly lubricate the TIZIP. To protect the pod while lubricating the TIZIP, place a cloth between the TIZIP and the pod.

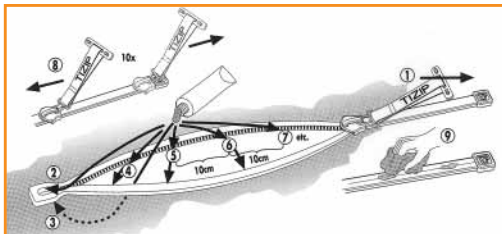

TIZIP LUBRICATION STEPS 1-9

Over >>

ADJUSTING THE BACKPACK

Photo 2



Photo 3



Photo 4



1. To properly fit the backpack, loosen all the straps and place the backpack on your back. Fasten the waistbelt and tighten so that it rests comfortably on your hips. *See photo 2*
2. Tighten the shoulder straps so the bag hangs comfortably.
3. The height of the shoulder harness is adjustable for different torso lengths. The shoulder harness is attached to an adjustable "torso plate" that moves up and down behind the DryFlo™ mesh back pad. (DryZone 200 only)

Loosen the load adjustment straps. *See photo 3*

To adjust to proper height, run your hand down the length and width of the hook and loop panels to separate. Keep one hand in place between the panels and move the "torso plate" up or down.

The stitching on the torso plate should not be higher than the top of the back pad. *See photo 4*

FINE-TUNING THE LOAD

Photo 5



1. Tighten the shoulder straps to transfer a portion of the weight to your shoulders.
2. Tighten the load adjustment straps to bring the pack closer to your shoulder and to stabilize the load. You can adjust the weight distribution to your personal preference while wearing the pack. *See photo 3 above*
3. Connect and tighten the sternum strap. You can change the vertical position so that the strap fits comfortably across your chest. The sternum strap reduces shoulder fatigue and increases mobility by pulling the shoulder straps inward. *See photo 5*

THE HIDDEN TRIPOD HOLDER

Photo 6



Photo 7



1. Pull the rip-cord on the bottom of the pack to extend the tripod holder. *See photo 6*
2. Unclip the quick release buckles.
3. Insert two of the tripod's legs into the tripod holder. *[a] See photo 7*
4. Fasten the tripod to the front of the DryZone with the quick-release buckles and tie-down bungee cords. *[b] See photo 7*
5. Tighten the bungee cords by pulling the cord locks.